


Vector™ V320™ GNSS Compass

All-in-one Professional Heading and Positioning Receiver

key features

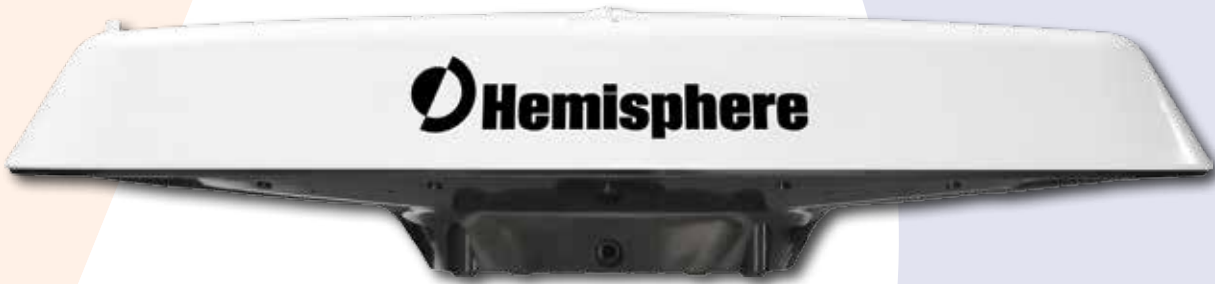

- Simple all-in-one RTK-capable heading solution
- Accurate heading with a precise baseline
- Dual frequency GPS/GLONASS/BeiDou RTK capable
- Maintain heading and position lock when more of the sky is blocked
- RTK, L-Band DGNSS, and SBAS capable
- COAST technology maintains differentially-corrected positioning for 40 minutes or more after loss of differential signal
- Integrated gyro and tilt sensors deliver fast start-up times and provide heading updates during temporary loss of satellites

Vector™ V320™ is the first all-in-one multi-frequency, multi-constellation GNSS smart antenna, which provides RTK level position and precise heading. Using Hemisphere's patented Eclipse™ GNSS technology, V320 is a strong addition to our VectorV family. The rugged IP69K design housing is sealed for the harshest environments. It incorporates fixed and pole mounting capability for both marine and land applications. The Vector V320 series are suitable for both dynamic positioning and professional marine surveys, as well as for machine control and other challenging applications.

The Vector V320 receiver, this all-in-one smart antenna, can be conveniently installed in multiple vessels and environments. With a set separation, V320 will consistently provide accurate position and heading accuracy. The Vector V320 uses L-Band and SBAS (WAAS, EGNOS, MSAS, etc.) for differential GPS position.



Vector V320 GNSS Compass

GNSS Sensor Specifications

Receiver Type: Vector GNSS L1/L2 RTK Receiver
 Signals Received: GPS, GLONASS, BeiDou
 Channels: 540
 GPS Sensitivity: -142 dBm
 SBAS Tracking: 3-channel, parallel tracking
 Update Rate: 10 Hz standard, 20 Hz available by subscription

Positioning Accuracy:

RMS:	Horizontal	Vertical
Single Point ¹ :	1.2 m	2.5 m
SBAS (WAAS) ² :	0.3 m	0.6 m
L-Band DGNSS ³ :	0.1 m	0.2 m
Code Differential		
GNSS ¹ :	0.3 m	0.6 m
RTK ^{2,4} :	10 mm + 1 ppm	20 mm + 2 ppm
Heading Accuracy:	0.17° rms	
Pitch/Roll Accuracy (RMS):	1°	
Heave Accuracy (RMS):	30 cm (DGPS) ⁵ , 10 cm (RTK) ^{2,4}	
Timing (1PPS) Accuracy:	20 ns	
Rate of Turn:	100°/s maximum	
Compass Safe		
Distance:	30 cm (with enclosure)	
Cold Start:	60 s (no almanac or RTC)	
Warm Start:	20 s typical (almanac and RTC)	
Hot Start:	1 s typical (almanac, RTC and position)	
Heading Fix:	10 s typical (valid position)	
Maximum Speed:	1,850 mph (999 kts)	
Maximum Altitude:	18,288 m (60,000 ft)	

L-Band Sensor Specifications

Sensitivity: -130 dBm
 Channel Spacing: 7.5 KHz
 Satellite Selection: Manual and Automatic
 Reacquisition Time: 15 seconds (typical)
 Rejection: 15 kHz spacing > 30 dB,
 300 kHz spacing > 60 dB

Communications

Serial Ports: 1 full-duplex RS-232; 1 full-duplex RS-422 and 1 half-duplex RS-422 (Tx only)
 Baud Rates: 4800 - 115200
 Correction I/O
 Protocol: RTCM SC-104, L-Dif™, RTCM v2 (DGPS), RTCM v3 (RTK), CMR (RTK), CMR+ (RTK) ³
 Data I/O Protocol: NMEA 0183, NMEA 2000, Crescent binary ⁵
 Timing Output: 1 PPS (CMOS, active high, rising edge sync, 10 kΩ, 10 pF load)
 Heading Warning I/O: Open relay system indicates invalid heading

Power

Input Voltage: 8 to 36 VDC
 Power Consumption: 6.10 W nominal (GPS L1/L2)
 7.25 W nominal (GPS L1/L2 + GLONASS L1/L2)
 8.50 W nominal (GPS L1/L2 + GLONASS L1/L2 + BeiDou B1/B2)
 9.50 W nominal (GPS L1/L2 + GLONASS L1/L2 + BeiDou B1/B2 + L-Band)
 Yes
 Reverse Polarity Protection: Yes

Environmental

Operating Temperature: -30°C to +70°C (-22°F to +158°F)
 Storage Temperature: -40°C to +85°C (-40°F to +185°F)
 Humidity: 95% non-condensing
 Mechanical Shock: EP455 Section 5.14.1
 Vibration: EP455 Section 5.15.1 Random
 EMC: CE (IEC 60945 Emissions and Immunity) FCC Part 15, Subpart B CISPR22
 Enclosure: IP69

Mechanical

Dimensions: 66.3 L x 20.9 W x 14.6 H (cm)
 26.1 L x 8.3 W x 5.8 H (in)
 Weight: 2.1 kg (4.6 lb)
 Status Indications (LED): Power
 Power/Data Connector: 18-pin, environmentally sealed

Aiding Devices

Gyro: Provides heading smoothing with GNSS. Drift rate is 1° per minute in heading for periods up to 3 minute when loss of GNSS has occurred ³
 Tilt Sensors: Provide pitch and roll data and assist in fast start-up and reacquisition of heading solution

1 Depends on multipath environment, number of satellites in view, satellite geometry, no SA, and ionospheric activity.

2 Depends on multipath environment, number of satellites in view, WAAS coverage and satellite geometry

3 Depends on multipath environment, number of satellites in view, satellite geometry, baseline length (for differential services), and ionospheric activity.

4 Based on a 40 second time constant

5 Hemisphere GNSS proprietary

Authorized Distributor:



Copyright Hemisphere GNSS, Inc. All rights reserved. Specifications subject to change without notice.

Hemisphere GNSS, Hemisphere GNSS logo, Eclipse, Eclipse logo, Vector, and L-Dif are trademarks of Hemisphere GNSS, Inc.

Rev. 04/15



Hemisphere GNSS, Inc.
 8444 N 90th Street, Suite 120
 Scottsdale, AZ, USA 85258

Toll-Free: +1-855-203-1770
 Phone: +1-480-348-6380
 Fax: +1-480-270-5070
 precision@hgnss.com
 www.hgnss.com